


MAX-FAN 150 - 425 - 3 SPEED

TECHNICAL DATASHEET

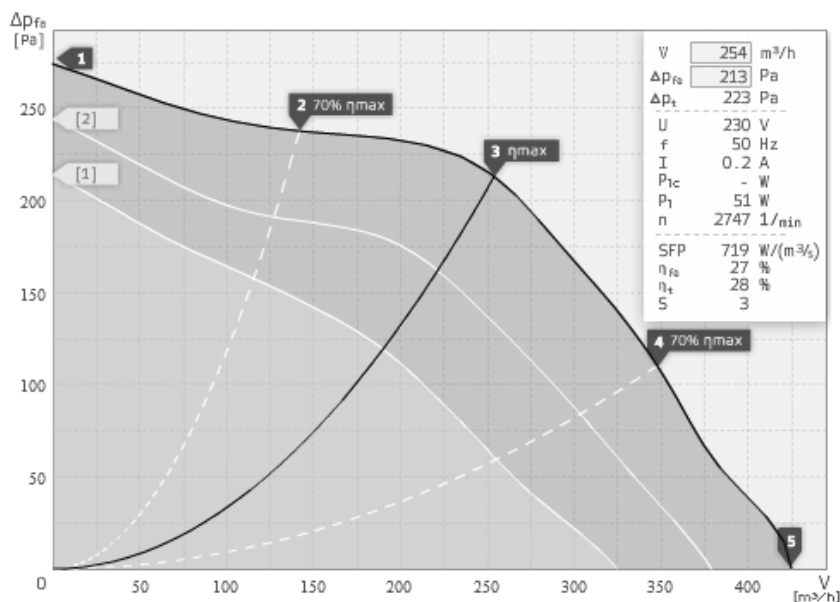

- Diagonal impeller with stator
- Plastic housing
- 3-step or speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,2	0,2	0,2	0,2	0,2
Power Consumption P1	W	44	46	51	51	49
RPM n	1/min	2839	2807	2747	2740	2767
SPL inlet LWA5	dB(A)	66	68	65	65	68
SPL outlet LWA6	dB(A)	67	71	67	67	70
SPL casing break out LWA2	dB(A)	56	57	54	54	57

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	64	33	43	49	58	61	59	56	45
Outlet	LWA6	67	32	42	50	60	64	61	58	48
Casing	LWA2	54	32	35	38	47	48	50	45	34

EL 150 E2M 01 122229	
Voltage UN	230 V 1~
Current Imax	0,2
Ambient Temperature tA	80 °C
Medium Temperature tM	80 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	2,2 kg

