




MAX-FAN 200 L - 900 - 3 SPEED

TECHNICAL DATASHEET

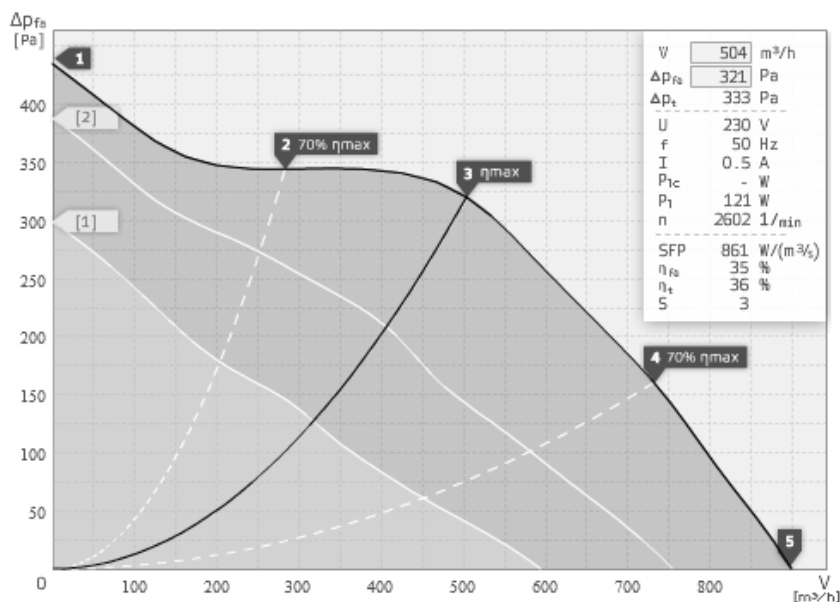

- Diagonal impeller with stator
- Plastic housing
- 3-step or speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,4	0,5	0,5	0,6	0,5
Power Consumption P1	W	91	104	121	125	113
RPM n	1/min	2820	2731	2602	2602	2703
SPL inlet LWA5	dB(A)	75	71	70	73	75
SPL outlet LWA6	dB(A)	77	73	72	75	77
SPL casing break out LWA2	dB(A)	66	62	62	64	69

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	69	44	42	54	62	66	64	60	52
Outlet	LWA6	72	44	42	57	65	69	67	62	52
Casing	LWA2	61	39	38	55	50	54	58	46	34

EL 200L E2M 01 121747	
Voltage UN	230 V 1~
Current Imax	0,6
Ambient Temperature tA	50 °C
Medium Temperature tM	50 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	3,3 kg

